

BEIREAP



Jiangsu Barep Smart Technology Co.,Ltd

Address: No.6,Xionghua Road,Tangqiao Town

Zhangjiagang City,Jiangsu Province

Tel: 0512-58920699

Fax: 0512-58920699

www.barepchina.com

**SMART SWITCH
SMART SOCKET**

Jiangsu Barep Smart Technology Co.,Ltd



COMPANY INTRODUCTION

Jiangsu Barep Smart Technology Co.,Ltd is a professional manufacturer who is researching, developing, producing, and selling for high reliability, widely used GFCI- Ground Falut Circuit Interrupter for USA, Canda, Mexico market.

Barep General Electric and all products are made under certificate, our company owns:

ISO 9001: 2008, and the products are widely used in the living room, kitchen, bathroom and various power tools like Generators. Products are widely export to North America, South America, Canada and other countries.

And we believe quality is everything, we closely follow the instruction from our clients and try to develop more NEMA specification items for civil and industrial products, to meet the needs of the foreign markets.



CONTENTS

GFCI

GFCI	02
GFCI NO-LOAD	05
GFCI WITH SWITCH	08
GFCI WITH USB	09

OUTLETS

USB OUTLETS	11
FAST CHARGING USB OUTLETS	17
STANDARD WALL OUTLET	21
OUTLETS WITH NIGHT LIGHT	23
POP-UP OUTLETS	25
FLUSH MOUNT POWER OUTLETS	27
TWIST-LOCK OUTLETS	29

POWER STRIP

..... 31

SWITCHES

DIMMER SWITCHES	33
MOTION SENSOR AND HUMIDITY SWITCHES	37
STANDARD SWITCHES	41
SWITCHES WITH NIGHT LIGHT	43
TOUCH SWITCH	45

JUNCTION BOXES

..... 47

PLUGS

STRAIGHT PLUGS	49
TWIST-LOCK PLUGS	51

WALL PLATE

..... 53

PULL-OUT SWITCH

..... 57

SMART HOME

..... 59



lamp



Washing machine



Television



Refrigerator



Iron



Microwave Oven



Fan



Soybean Milk machine



GFCI

YGB-092



YGB-093



YGB-094

TR

TAMPER RESISTANT



YGB-095

TR

TAMPER RESISTANT



YGB-092WR

WR

WEATHER RESISTANT



YGB-093WR

WR

WEATHER RESISTANT



YGB-094WR

TR

TAMPER RESISTANT

WR

WEATHER RESISTANT



YGB-095WR

TR

TAMPER RESISTANT

WR

WEATHER RESISTANT



GFCI

SPECIFICATIONS

Rated current
15A /20A

Rated voltage
125V

Power frequency
60Hz

Dielectric Voltage Withstand
1500V(AC)

Mechanical life
6000 times

Flame class
UL-94 V2

Trip threshold
5mA

Trip time
< 25mS

Wires
12-14AWG



5-15R



5-20R

Available in the colors:



White
Lvory
Almond
Black
Brown
Gray





BAS-002

BAS-003

BAS-004

BAS-005



BAS-002WR

BAS-003WR

BAS-004WR

BAS-005WR



BAS-004M

BAS-005M

BAS-004MWR

BAS-005MWR



NOT AFRAID OF HUMIDITY





GFCI NO-LOAD

Only line terminals are included to connect the power input, but not load terminals, so it is impossible to directly supply power and protect other sockets.

NL series only
available in
black

GFCI socket has no load terminal, which reduces the risk of misoperation.

YGB-092NL

YGB-092NLWR

YGB-093NL

YGB-093NLWR



YGB-094NL

YGB-094NLWR

YGB-095NL

YGB-095NLWR





GFCI WITH SWITCH

Combining the socket and switch into a sleek white panel, is not only pleasing but also maximizes space utilization, especially ideal for older homes with limited openings; the GFCI socket comes with a built-in single-pole switch, which can be wired to function as a regular switch.

BAA-001



BAA-002





GFCI WITH USB

By integrating the GFCI and USB functions, this device offers a one - stop solution. It not only ensures the safety of electrical usage but also provides a convenient way to charge multiple devices simultaneously. In a household setting, it can be installed near sinks in the kitchen for charging mobile devices while cooking, or in the bathroom for charging electric toothbrushes and other personal care gadgets. In offices, it can be placed on desks, allowing employees to charge their smartphones, tablets, and other portable devices while working, all while being protected from potential electrical hazards. In public areas like hotels, cafes, and airports, it provides a safe and user - friendly charging option for customers and travelers.

BCG-001U

4.8A TYPE A+A

BCG-002U

4.8A TYPE A+A

BCG-003U

4.8A TYPE A+C

BCG-004U

4.8A TYPE A+C

Features

A Ground Fault Circuit Interrupter receptacle (GFCI) is different from conventional receptacles. It can detect current leakage as little as 5 milliamps and shut off the power in 1/40 of a second.

In the event of a ground fault, a GFCI will trip and quickly stop the flow of electricity to prevent serious injury. The standards for these safety products are set forth by Underwriters Laboratories (UL) in UL 943 (GFCI) and UL 498 (Receptacles).

- Protect against ground fault shock hazards from frayed wiring, damaged appliances, or wherever electrical contact might provide a path to ground through a human body.
- The electromagnetic operating mechanism makes our GFCI more stable and enduring.
- With End of Life notification, our GFCI complies with the latest UL standard. When the GFCI trips, the RESET button will protrude, which provides clear notification of the GFCI's status.
- With SMT technology, the chip electronic components become more stable.
- With special barcode identification technology, we can effectively control the quality.
- Trip at 5 mA (± 1 mA) threshold.
- Trip in 0.025 seconds for a 240 Ma fault.
- Can be wired to provide feed - through protection to other outlets on the same circuit.
- TR Tamper Resistant: Provide a simple, permanent solution for preventing common household shock and electrical burn injuries.
- WR Weather Resistant: Designed with enhanced corrosion - and UV - resistant components, weather - resistant receptacles are for extra - durable use in outdoor locations.



USB WALL OUTLET

SPECIFICATIONS


Receptacle Rating
125V, 60Hz, 15A/20A

USB Rating
5VDC, 4.8A



Dielectric Voltage Withstand
1.25KV/1 min

Flame Classifications
UL94-V2

Wire
12-14 AWG



Available in the colors:

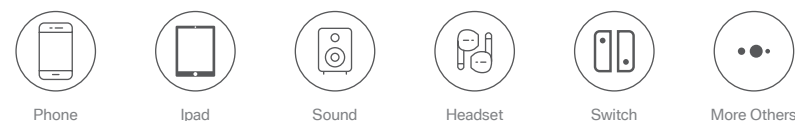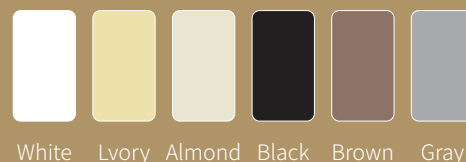

USB WALL OUTLET

A socket with USB ports is an electrical device that combines traditional power sockets and USB charging interfaces. It is designed to provide a convenient charging solution for small electronic devices in modern life. The design with multiple USB ports enables more efficient use of socket space, avoiding spatial conflicts among traditional plugs. It allows for direct charging using a USB cable without the need for an additional charger, which greatly facilitates daily use. It is widely applied in places such as homes, offices, and hotels.

BAA-016 **2.4A** TYPE A



BAA-017 **4.8A** TYPE A






BAA-023 4.8A TYPE A




BAA-015 4.8A TYPE A+C



BAA-025 4.8A TYPE C

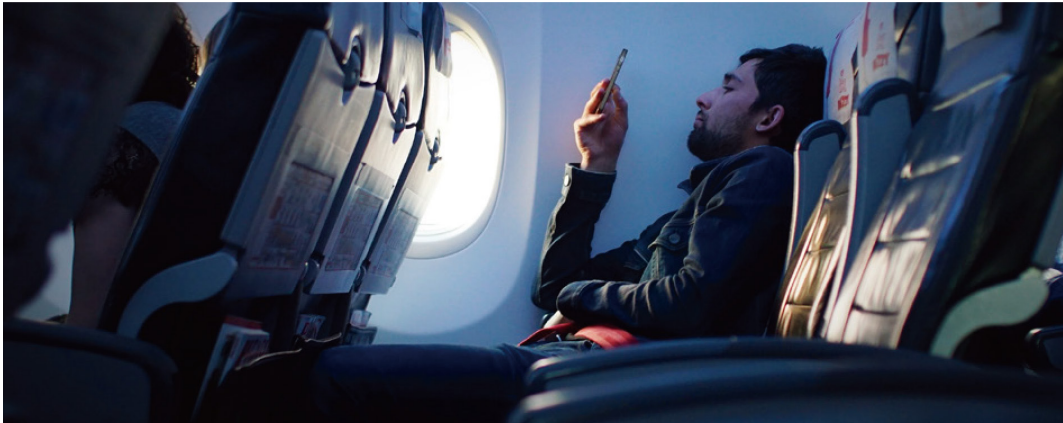

BAA-023D 4.8A TYPE A

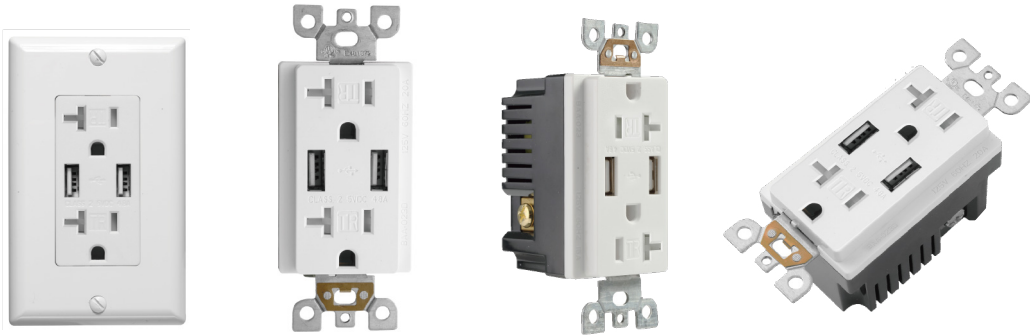

BAA-015D 4.8A TYPE A+C



BAA-025D 4.8A TYPE C



BAO-006 4.8A TYPE A+C



BAO-007 4.8A TYPE C



FAST CHARGING USB OUTLETS

SPECIFICATIONS

Receptacle Rating
 125V, 60Hz, 15A/20A


Dielectric Voltage Withstand
 1500VAC

Flame Classifications
 UL94 V2

Operating Temperature
 0°C~40°C

Wire
 12-14AWG

Available in the colors:




FAST CHARGING USB OUTLETS

Features one USB C and two USB A ports, providing a combined 30W to efficiently charge multiple devices simultaneously. Built-in protocol chips ensure optimal charging for all devices. Compatible with all kinds of USB devices with multiple charging protocols including Apple Protocols, Samsung Protocols and Standard BC1.2. Note: Does not support fast charging; Not suitable for laptops.

The elegant matte surface enhances modern decor, and the durable thermoplastic housing resists impacts and scratches. Comes with a sleek, screwless wall plate for a seamless, stylish look.


Our USB outlets feature efficient power solutions with advanced cooling, reducing heat for safer use and longer product life. Fire-resistant materials, child-proof shutters, and ultra-quiet performance ensure both safety and comfort. USB C tested for 10,000 insertions, USB A for 8,000—built to last.

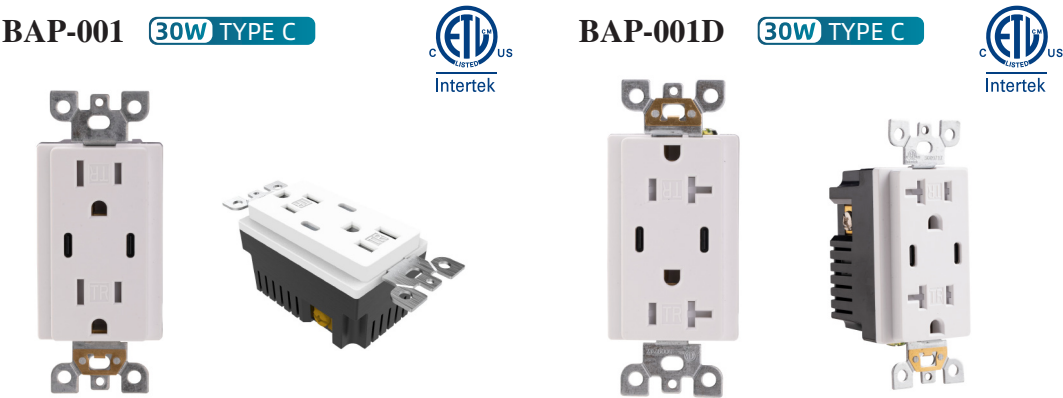

BAP-002 30W TYPE A+C




BAP-002D 30W TYPE A+C

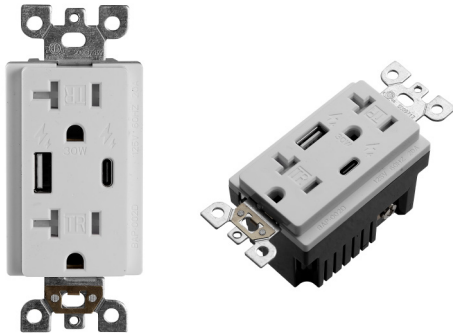


BAP-003 30W TYPE 2A+C



BAP-003D 30W TYPE 2A+C

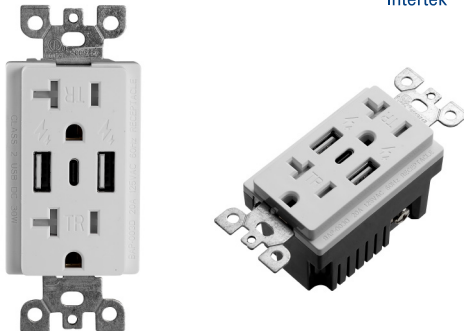

BAP-004 30W TYPE 2C+A

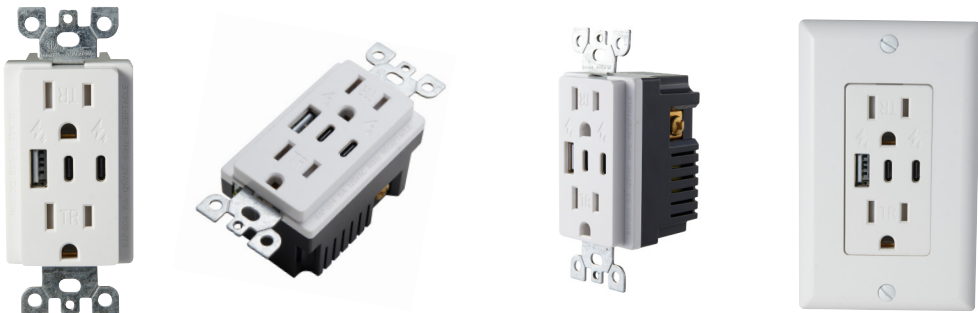

BAP-004D 30W TYPE 2C+A



STANDARD WALL OUTLET

SPECIFICATIONS


Rated current
15A/20A

Rated voltage
125VAC

Flame Classifications
UL94 V2

Dielectric Voltage Withstand
2000Vac/1Min


Working temperature
14~140°F (-10~60°C)



Available in the colors:



White Ivory Almond Black Brown Gray

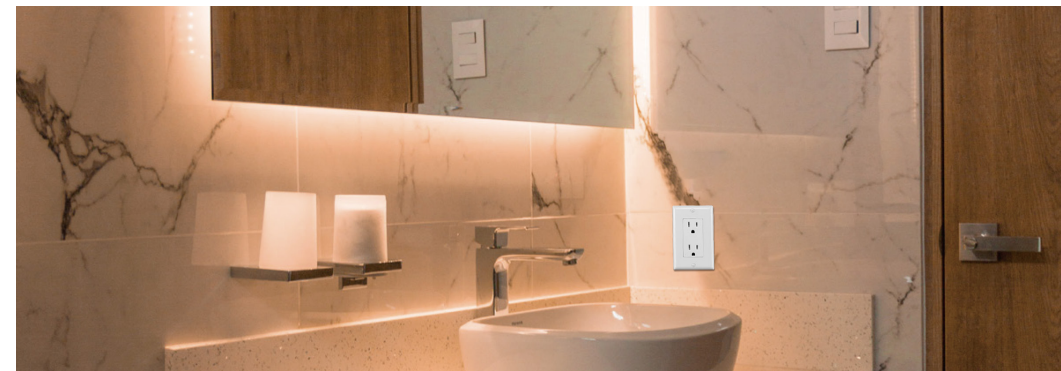


STANDARD WALL OUTLET

This power outlet is ideal for residential, multi-dwelling and hospitality applications, and matches other switches and outlets so you can complete the look with a matching screwless wall plate, sold separately. The tamper resistant outlet is made of durable and sturdy high-impact resistant thermoplastic construction and long-term blade retention for extended service life.

YGB-045



YGB-047

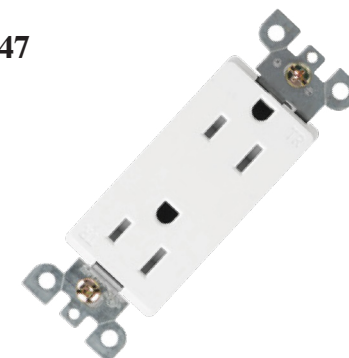

YGB-048



YGB-050



OUTLET WITH NIGHT LIGHT

SPECIFICATIONS

BAS-032/BAS-032D

Receptacle Rating

125V, 60Hz, 15A/20A

Dielectric Voltage Withstand

1500VAC

Flame Classifications

UL94 V2

Operating Temperature

0°C~40°C

Wire

12-14AWG

Available in the colors:



White Black

OUTLET WITH NIGHT LIGHT | **BEIREAP®**

OUTLET WITH NIGHT LIGHT



BAS-032



BAS-032D

Features

- ◆ Offering soft illumination to light your way without occupying socket space. Perfect for hallways or bedrooms, it combines a nightlight and outlet, keeping your home safe and lit at night
- ◆ The built-in light sensor automatically activates at dusk and turns off at dawn. On overcast days or in dim spaces, the light stays on, offering continuous, gentle guidance as you move through your home.
- ◆ The energy-efficient LED nightlight uses only 0.2W of power when lit. Perfect for spaces like staircases or bathrooms, it provides reliable, low-energy illumination without increasing your electric bill, guiding you safely through your home at night
- ◆ Ideal for hallways, staircases, bedrooms, or living rooms, product with guide light offers gentle illumination for families, pets, and seniors. It provides enough light to avoid accidents at night without being too bright or disruptive to your rest

Energy-Efficient Nightlight Outlet

Save more, spend Less,
protect the environment



Standby < 0.1W,
Operation < 0.2W



POP-UP OUTLET

SPECIFICATIONS

Receptacle Rating

125V, 60Hz, 15A/20A

Dielectric Voltage Withstand

1500VAC

Flame Classifications

UL94 V2

Operating Temperature

0°C~40°C

Wire

12-14AWG

Available in the colors:



White Black



POP-UP OUTLET

GFCI outlets provide leak and shock protection, rated: 15A 125V 60Hz 1875W, USB ports: 24W Max, delivering stable, heavy-duty power for kitchens, offices, and other home or commercial applications.

GFCI outlets, 1 USB-C port, and 1 USB-A ports (5V/2.4A per port, 24W total) , allowing simultaneous charging of phones, tablets, laptops, and other appliances.

Drop into a 4.3" hole and tighten the ring for effortless installation into countertops or desks. When not in use, the socket retracts 6.14 inches beneath the surface, keeping the workspace clean and clutter-free.

CPS-001



FLUSH MOUNT POWER OUTLET

SPECIFICATIONS

Rated current
50A MAX

Rated voltage
125V~250V

Insulation resistance
>10MΩ (DC500V)


Withstand voltage
2000V AC/3S

Clamshell
PA6

Optoelectronics
Copper alloy, surface pickling

Certification Information
UL

Available in the colors:



White Black

FLUSH MOUNT POWER OUTLET

Flush mount receptacle feature a heavy gauge galvanized steel mounting strap for corrosion resistance. Fits in BOTH single and 2-Gang box styles.

UL Listed. Flammability rating is V-2 per UL94, Industrial Grade , Straight Blade, Grounding. Durable nylon construction provides high impact resistance. Large and brass contacts produce superior contact pressure that results in outstanding conductivity.

This flush mount power outlet is widely used for electrical & heating, cord and power management.

Flush receptacles are completely ready-to-wire, shorten installation time significantly. Terminals marked for easy identification and fast wiring.



BAS-001

50A 5-50R



BAS-022

30A TT-30R



BAS-022A




BAS-023

50A 14-50R



BAS-023A



BAS-038

50A 10-50R



BAS-038A



TWIST-LOCK OUTLETS

SPECIFICATIONS

Rated current
30A MAX

Rated voltage
125V~250V

Insulation resistance
>10MΩ (DC500V)

Withstand voltage
2000V AC/3S

Clamshell
PA6

Optoelectronics
Copper alloy, surface pickling

Certification Information
UL

Available in the colors:



TWIST-LOCK OUTLETS

Nylon body and cover for outstanding resistance to impact and harsh chemicals. One-piece, high-grade brass contacts offer excellent conductivity and heat-rise resistance. Secure locking design that receptacle is locking tightly on electrical equipment to keep it from vibrating loose and falling out.

Single-piece, the nickel-plated mounting strap is double riveted to the body for added strength. Heavy interior walls provide additional support to ensure contact retention. UL V-2 Flammability Rating. Combination back and side wiring terminal design allows for fast installation. Serrated terminal plates bite wire to ensure strong, reliable wiring connections. Space-saving design allows more room in the box for wiring. #10 terminal screws for faster, more secure installation. Industrial Grade for Generators, Transfer Switches, Welding Equipment, Marine or RV Camper Power, etc.

BAS-024
30A L14-30



BAS-024A



BAS-025
30A L5-30



BAS-025A



BAS-033
30A L6-30



BAS-033A



POWER STRIP

SPECIFICATIONS

Receptacle Rating
125VAC, 60Hz, 15A

USB Rating
5VDC 3.4A(total)/2.4A(single)

LED Lights
1000 total lumens

Dielectric Voltage Withstand
1500V(AC)

Flame Classifications
UL94-V2



5-15R

Available in
the colors:



Black

SAFE AND RELIABLE



POWER STRIP


BAA-004



BCP-004



BCP-004C

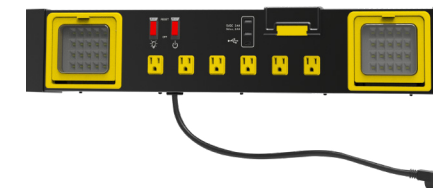

BCP-009



BCP-010



BCP-011



DIMMER SWITCH

SPECIFICATIONS

Voltage/Frequency
120VAC 60Hz

Incandescent (Tungsten-Filament)
600W

CFL/LED/Electronic self-ballasted
150W / 300W

Switching Life
40000 times

Flame Classifications
UL94-V2

Wire
18AWG


Available in the colors:



White Ivory Almond Black Brown Gray

Dimmer Switch

Smooth, Flicker-Free, and Silent Dimming

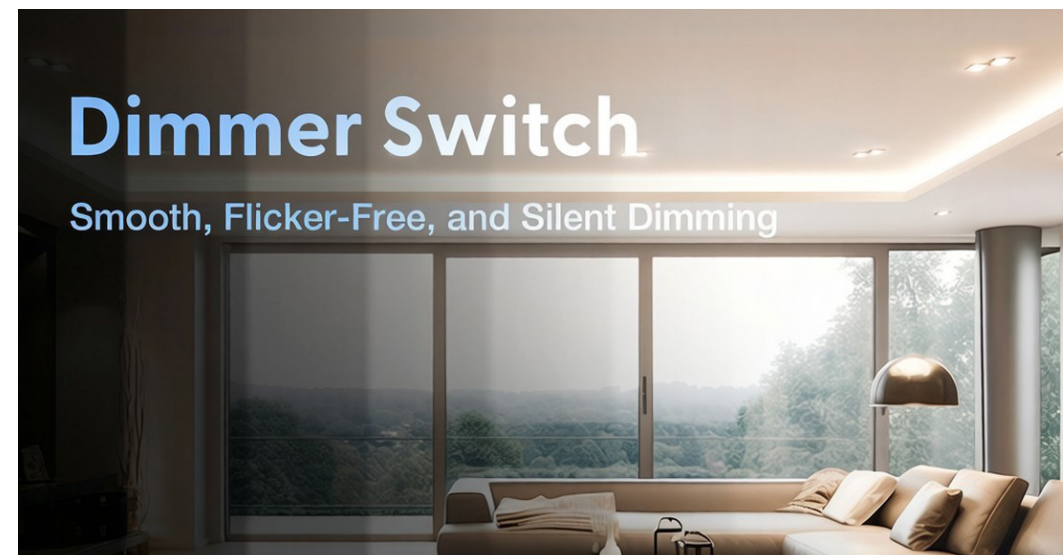

DIMMER SWITCH

Utilizes MCU-integrated digital circuit control to provide smooth gradual lighting for LEDs. The fade-on function helps the eyes naturally adapt to new brightness levels while reducing inrush current to extend the service life of both bulbs and the dimmer.

Works with dimmable LED/CFL rated up to 300W, Incandescent & Halogen light lamp bulbs rated up to 600W on the market. Works with 99% of dimmable LED, CFL, Incandescent & Halogen light lamp bulbs.

Can be used in single-pole or 3-Way applications, where lights are controlled from one or two locations. Use only one dimmer in a 3-or-4-way circuit. The other 3-or-4-way switch(es) will turn the light on at the brightness level selected at the dimmer.

BAK-004(single pole)
BAK-004A (3-way)



BAK-004AG



BAK-004G(300W)



BAK-008 (3-way)




BAK-010A(0-10V)



BAK-004BG&CG



BAK-012C

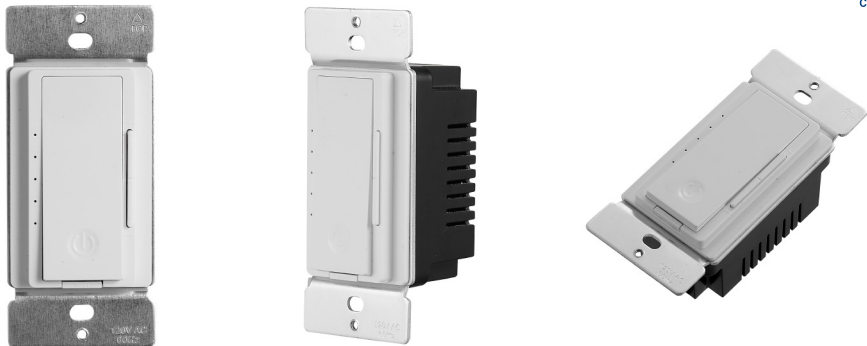

HIGH POLISH
PANEL

MOTION SENSOR AND HUMIDITY SWITCHES

SPECIFICATIONS

Voltage/Frequency
120VAC 60Hz

Incandescent (Tungsten-Filament)
600W

CFL/LED/Electronic self-ballasted
150W / 300W

Switching Life
40000 times

Flame Classifications
UL94-V2

Wire
18AWG

Available in the colors:



White Ivory Almond Black Brown Gray

MOTION SENSOR AND HUMIDITY SWITCHES

Dual-tech in-wall humidity control switch that controls both the bathroom fan and light simultaneously. Dual technology of a passive infrared (PIR) motion sensor switch and a humidity sensor switch for the fan. Automate light and exhaust fan control to keep your hands free.

Converts bathroom ventilation fan control wall switch with this smart humidity control switch, turning fan ON automatically when humidity exceeds preset level and turning OFF as it drops to normal to eliminate excess humidity.



Features simple controls and operates in two modes: Occupancy Mode (auto on/off lights, auto on/off fan), and Vacancy Mode (manual on/ auto off lights, auto on/off fan). Adjustable time delay and humidity level.

Switches to control bathroom light and fan separately; Compatible with LED light bulbs; Energy savings of up to 40% with motion sensing control; Complies with CA Title 24

BAG-001



BAK-011A (PIR)

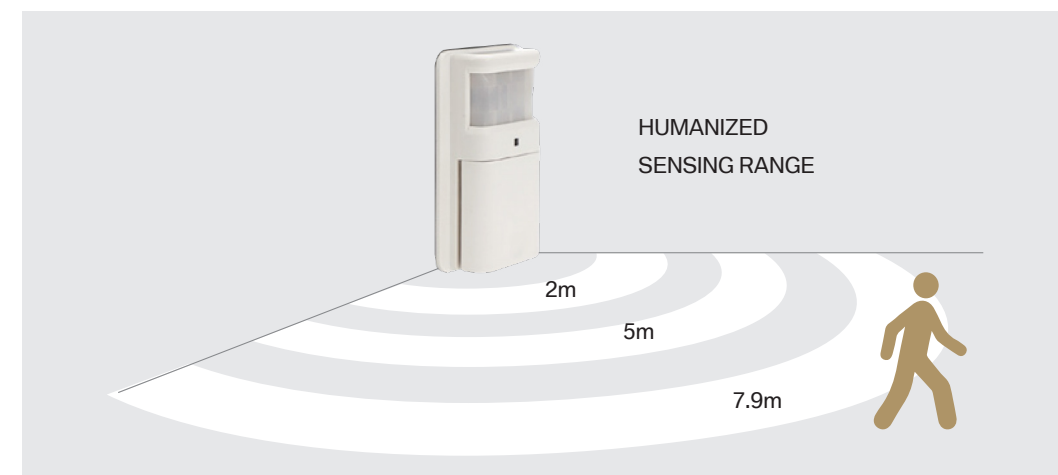



BSS-001



- ◆ Three adjustable humidity levels for custom control.
- ◆ Manual & automatic mode.
- ◆ Automatically controls:Use microprocessor and digital sensing technology to continuously monitor and manage humidity levels.
- ◆ Single way,Neutral wire required.

BSS-002



- ◆ The BSS-002 is a wall mounted fan switch.The product supports 5-speed regulation, and supports timing setting and switching functions.
- ◆ The fan load supports 3 amps of operating current.
- ◆ The product is mainly used in offices, homes and other places.

Power supply
120VAC、60Hz
Maximum Resistive load
3 Amps
Maximum inductive load
150W LED/CFL
Maximum motor load
1/6HP
Fan delay time
20 mins
Humidity range
45%-80%RH
Wire
18AWG
Cable specification
18 AWG

Power supply
120VAC、60Hz
Maximum fan load
3Amps
Dielectric Voltage Withstand
1.25KV/1min
Flame Classifications
UL94-V2
Wire
18AWG

BSS-003



- ◆ The BSS-003 is a 3-in-1 wall combination switch with PIR, lights, and air circulation fan automatic timing.It combines infrared motion detection to automatically control the lights in the room.It also supports manual control of fans and lights in the room.
- ◆ The PIR motion sensor has a 110° detection range with a wide sensing coverage. It features two adjustable operation modes for customized control to suit the specific lighting needs of the room. In automatic mode, the lights turn on automatically when motion is detected and automatically turn off if no movement is detected and the time delay setting has expired. In manual mode, the device is factory preset to turn on the lights manually and automatically turn off the lights if no movement is detected and the selected delay time has expired. The count-down timer can also be adjusted to set the minimum "ON" time for the lights at 1minute, 10 minutes, 20 minutes, or 30 minutes.
- ◆ The fan load supports 3 amps of operating current. The product supports 5-speed regulation. The fan uses the timer to automatically start and close the fan cycle

Power supply
120VAC、60Hz
Maximum light load
500W Incandescent/halogen 150W LED/CFL
Maximum fan load
3Amps
Dielectric Voltage Withstand
1.25KV/1min
Flame Classifications
UL94-V2
Wire
18AWG

within the specified time. The indoor air is changed regularly to keep fresh air in the room. This air circulation fan timer is very important in cold and high humidity areas where the door is often kept closed in order to maintain the temperature of the room."

- ◆ This product is mainly used in places that require air circulation and automatic lighting, such as basements, offices, homes, etc.
- ◆ This device is compatible with incandescent lamps, fluorescent lamps, halogen lamps, and LED lamps.

BSS-004



- ◆ 1.The BSS-004 is a 4-in-1 wall switch with PIR detection, humidity sensor, light and fan control. It combines humidity detection and infrared motion detection to automatically control the fan and lights in the room.
- ◆ The PIR motion sensor has a 110° detection range with a wide sensing coverage. It features two adjustable operation modes for customized control to suit the specific lighting needs of the room. In automatic mode, the lights turn on automatically when motion is detected and automatically turn off if no movement is detected and the time delay setting has expired. In manual mode, the device is factory preset to turn on the lights manually and automatically turn off the lights if no movement is detected and the selected delay time has expired. The count-down timer can also be adjusted to set the minimum "ON" time for the lights at 1minute, 10 minutes, 20 minutes, or 30 minutes.
- ◆ This device is a 3Amp, single pole Humidity/PIR sensor switch. The humidity sensor determines whether to activate the fans based on the

Power supply
120VAC、60Hz
Maximum light load
500W Incandescent/halogen 150W LED/CFL
Maximum fan load
3Amps
Dielectric Voltage Withstand
1.25KV/1min
Flame Classifications
UL94-V2
Wire
18AWG

detected humidity value. The fans will turn ON automatically when the humidity level reaches the selected (high, medium, or low) level and will automatically turn OFF when the humidity level drops low enough.

- ◆ This device is mainly used in damp areas such as bathrooms, changing rooms, or areas prone to mold production
- ◆ This device is compatible with incandescent lamps, fluorescent lamps, halogen lamps, and LED lamps.

STANDARD SWITCHES

Available in the colors:



SPECIFICATIONS

YGD-001 / YGD-002 / YGD-003
BAK-001 / BAK-002

Receptacle Rating
120VAC, 60Hz, 15A

Switching Life
40000 times

Dielectric Voltage Withstand
1500V(AC)

Flame Classifications
UL94-V2

BAK-005 / BAK-007

Receptacle Rating
120-277V, 60Hz, 15A

Voltage endurance
1.25KV/1min

Cable specifications
14AWG

Flame Classifications
UL94-V0



STANDARD SWITCHES



YGD-001 (Single Pole)



YGD-002



YGD-003 (Single Pole)



BAK-001(3-WAY)



BAK-002(3-WAY)



BAK-005(4-WAY)



BAK-007(4-WAY)



SWITCHES WITH NIGHT LIGHT

SPECIFICATIONS

BAK-002L/YGD-003L

Receptacle Rating

120V, 60Hz, 15A

Voltage endurance

1500VAC

Mechanical lifespan of switch

20000 cycles

Flame Classifications

UL94 V2

Working temperature

0°C~40°C

Wire

12-14AWG

Available in the colors:



White Black

SWITCHES WITH NIGHT LIGHT



BAK-002L(LED ON BOTH SIDES)

YGD-003L

Features

- ◆ Offering soft illumination to light your way without occupying socket space. Perfect for hallways or bedrooms, it combines a nightlight and outlet, keeping your home safe and lit at night
- ◆ The built-in light sensor automatically activates at dusk and turns off at dawn. On overcast days or in dim spaces, the light stays on, offering continuous, gentle guidance as you move through your home.
- ◆ The energy-efficient LED nightlight uses only 0.2W of power when lit. Perfect for spaces like staircases or bathrooms, it provides reliable, low-energy illumination without increasing your electric bill, guiding you safely through your home at night
- ◆ Ideal for hallways, staircases, bedrooms, or living rooms, product with guide light offers gentle illumination for families, pets, and seniors. It provides enough light to avoid accidents at night without being too bright or disruptive to your rest



Less than 12 cents to run for one entire year

ENERGY EFFICIENT

TOUCH SWITCH

SPECIFICATIONS

Input Rating
 120VAC, 60Hz

Tungsten filament lamp
 7-480W

LED lamp
 7-150W

Flame Classifications
 UL94-V 2

Operating temperature
 - 20 to 60 °C

Wires
 18 AWG

Available in the colors:



White Ivory Almond Black Brown Gray



TOUCH SWITCHES



BAK-101



BSM-001

BSM-002

BSM-003

JUNCTION BOX

SPECIFICATIONS

High resistance to deformation
Strong anti pressure, no distortion

Flame retardant grade
Shell material flame retardant grade UL94 -VO

Adaptation property
American Standard switch socket adapter all accord with NEMA

Meet the standard
ANSI/NEMA standard published in accordance with the OS 2-2013 NEMA non metal export box,equipment box,cover and box support standard requirements

Available in the colors:



Black Gray

JUNCTION BOX

YGC-013X



YGC-014X



YGC-015X



YGC-016X



YGC-017X



YGC-018X



YGC-013




YGC-014




YGC-015



YGC-016



YGC-017



YGC-018



STRAIGHT PLUGS

SPECIFICATIONS

Rated current	50A
Rated voltage	125VAC/250VAC
Insulation resistance	R2≥500MΩ
Contact resistance	R1≤50MΩ
Withstand voltage	2500V AC(50/60Hz)
Fire rating of rubber shell	UL94-V2
Working temperature	14~140°F (-10~60°C)

Available in the colors:



STRAIGHT PLUGS

BCT-008



Rated current

20A

Rated voltage

125V

Insulation resistance

>10MΩ(DC500V)

Withstand voltage

2000V AC/3S

Clamshell

PA6

Optoelectronics

Copper alloy, surface nickel plating

Certification Information

UL & CUL



BCT-010

30A TT-30



Rated current

30A

Rated voltage

125V/250V

Insulation resistance

>10MΩ(DC500V)

Withstand voltage

2000V AC/3S

Clamshell

PA6

Optoelectronics

Copper alloy, surface pickling

Certification Information

UL & CUL

BCT-016



Rated current

15A

Rated voltage

125V

Insulation resistance

>10MΩ(DC500V)

Withstand voltage

2000V AC/3S

Clamshell

PA6

Optoelectronics

Copper alloy, surface nickel plating

Certification Information

UL & CUL

BCT-018

50A 14-50



Rated current

50A MAX

Rated voltage

125V~/250V~

Insulation resistance

>10MΩ(DC 500V)

Withstand voltage

2000V AC/3S

Clamshell

PA6

Optoelectronics

Copper alloy, surface pickling

Certification Information

-

BCT-023

50A 10-50



Rated current

50A MAX

Rated voltage

125V~/250V~

Insulation resistance

>10MΩ(DC 500V)

Withstand voltage

2000V AC/3S

Clamshell

PA6

Optoelectronics

Copper alloy, surface pickling

Certification Information

-

TWIST-LOCK PLUGS

SPECIFICATIONS

Rated current
30A MAX
Rated voltage
125V~250V
Insulation resistance
>10MΩ (DC500V)
Withstand voltage
2000V AC/3S
Clamshell
PA6
Optoelectronics
Copper alloy, surface pickling
Certification Information
UL

Available in the colors:



TWIST-LOCK PLUGS

BCT-002

30A L5-30



Rated current
30A
Rated voltage
125V
Insulation resistance
>10MΩ(DC500V)
Withstand voltage
2000V AC/3S
Clamshell
PA6
Optoelectronics
Copper alloy, surface pickling
Certification Information
UL & CUL

BCT-003

30A L14-30



Rated current
30A
Rated voltage
125V/250V
Insulation resistance
>10MΩ(DC500V)
Withstand voltage
2000V AC/3S
Clamshell
PA6
Optoelectronics
Copper alloy, surface pickling
Certification Information
UL & CUL

BCT-017

30A L6-30



Rated current
30A MAX
Rated voltage
250V~
Insulation resistance
>10MΩ(DC 500V)
Withstand voltage
2000V AC/3S
Clamshell
PA6
Optoelectronics
Copper alloy, surface pickling
Certification Information
UL

WALL PLATE

Available in the colors:



White Ivory Almond Black Brown Gray



WALL PLATE

Decorative




YGC-009




YGC-004



YGC-005

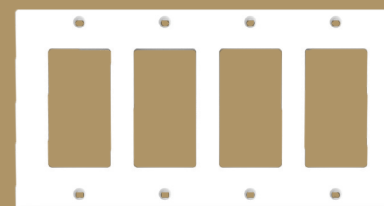

YGC-006

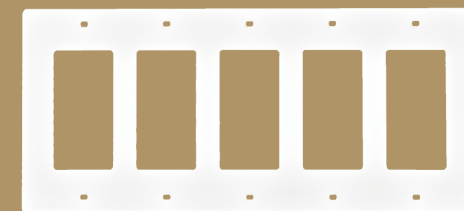

YGC-020



YGC-021

Duplex



YGC-010




YGC-002


Blank



BAC-001




YGC-008



YGC-042

Box Extender



BAB.N-001

Toggle



YGC-011



YGC-012



YGC-022



YGC-023

Duplex & Decor / Duplex & Toggle / Decor & Toggle



YGC-024



YGC-025



YGC-026

Screwless Decor



YGC-009NS



YGC-004NS



YGC-005NS



YGC-006NS



YGC-039



YGC-040

OUTDOOR COVER




BAH-001



BAH-002



BAO-001



BAO-002



BAO-003




BAO-004

PULL-OUT SWITCH

Available in the colors:

(Customizable)

Gray

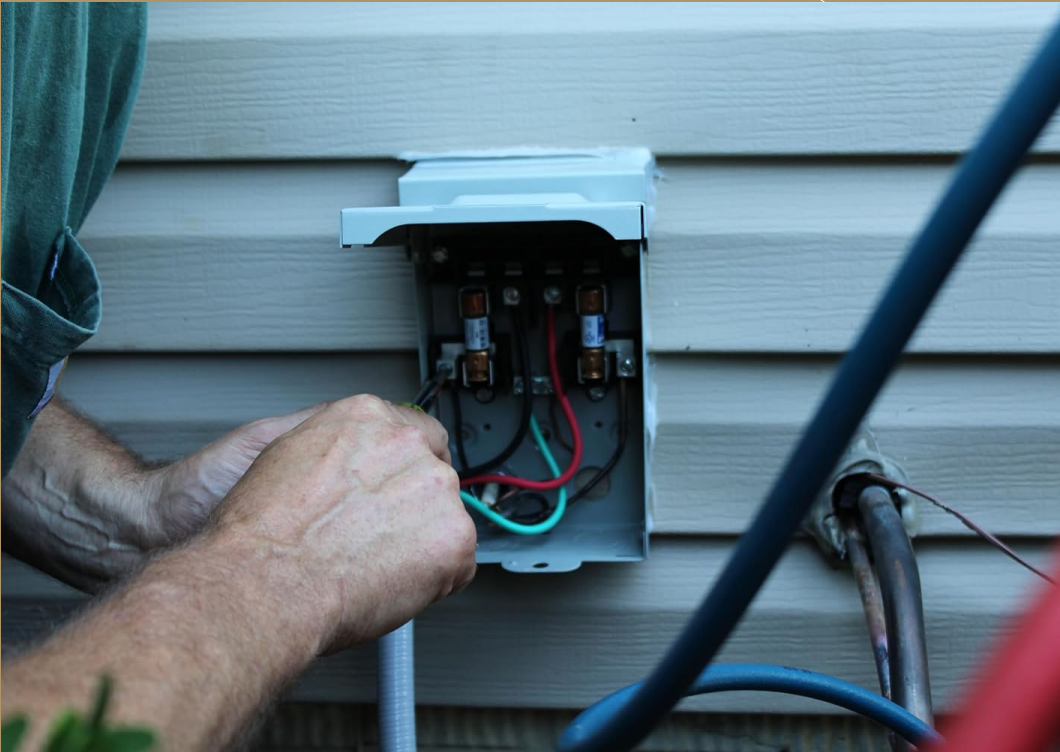

PULL-OUT SWITCH

	BAK-PS60 60A small shell		Rated current 60 Amp
			Rated voltage 120/240 VAC
			Waterproof grade of shell TYPE 3R
	BAK-PSW60 60A large shell		Clamshell PC & SPCC
			Optoelectronics Copper alloy, surface nickel plating
			Certification Information UL & CUL
	BAK-PSW30F 30A large shell Fused (▲ Fuse not Included)		Rated current 60 Amp
			Rated voltage 120/240 VAC
			Waterproof grade of shell TYPE 3R
	BAK-PSW60F 60A large shell Fused (▲ Fuse not Included)		Clamshell PC & SPCC
			Optoelectronics Copper alloy, surface nickel plating
			Certification Information UL & CUL
	BAK-PSW30F 30A large shell Fused (▲ Fuse not Included)		Rated current 30 Amp
			Rated voltage 120/240 VAC
			Waterproof grade of shell TYPE 3R
	BAK-PSW60F 60A large shell Fused (▲ Fuse not Included)		Clamshell PC & SPCC
			Optoelectronics Copper alloy, surface nickel plating
			Certification Information UL & CUL
	BAK-PSW60F 60A large shell Fused (▲ Fuse not Included)		Rated current 60 Amp
			Rated voltage 120/240 VAC
			Waterproof grade of shell TYPE 3R
	BAK-PSW60F 60A large shell Fused (▲ Fuse not Included)		Clamshell PC & SPCC
			Optoelectronics Copper alloy, surface nickel plating
			Certification Information UL & CUL

SMART HOME



SMART HOME



BSG-001(Has WIFI function)

Receptacle Rating

125V, 60Hz, 15A

USB Rating

USB-A:(5V3A 9V2A 12V1.5A)
 TYPE-C:(5V3A 9V2.22A 12V1.67A)
 USB-A+TYPE-C:(5V3A)

Dielectric Voltage Withstand

1.25KV/1min

Flame Classifications

UL94-V2

Wire

12-14AWG



Equipped with smart WiFi



BAK-009S

Load

Max. 350 W incandescent or
 Max. 150 W LED/CFL

Dielectric Voltage Withstand

1250VAC/1Min

Wifi


2.4G

Voltage

120VAC 60Hz

APP

Smart Life Tuya



BAA-032

Receptacle Rating

125VAC 60Hz 15A

USB Rating

5VDC 3A

Dielectric Voltage Withstand

1.25KV/1min

Wireless

Wi-Fi(2.4GHz)+BLE



BAA-035

Receptacle Rating

125VAC 60Hz 15A

Dielectric Voltage Withstand

1.25KV/1min

Wireless

Wi-Fi(2.4GHz)+BLE